

Silentflor

Design Led Acoustic Sheet Flooring



Design Led Acoustic Sheet Flooring

Acoustics are essential in the functionality of a building as they support the intended use of each space, managing how sound behaves within and between rooms.

Flooring plays a significant role in overall acoustic performance, and Polyflor's Silentflor 19dB heterogeneous flooring is specifically engineered to greatly reduce impact sound transmission, promoting quieter and more tranquil environments.

By absorbing and dampening noise at its source, Silentflor 19dB enhances acoustic quality, contributing to a more comfortable, peaceful, and productive indoor atmosphere.



Heterogeneous Vinyl Sheet



Acoustic Backing for sound reduction and comfort









UK manufactured



2 x 20m sheet flooring



34 designs

parquet, wood, concrete, terrazzo, infinity and cosmos



34 weld rods colour matched



0.7mm wear layer

designed for commercial interiors



Specific EPD Independently verified



Low VOC's Indoor Air Comfort Gold




Easy clean lifetime polish free

Silentflor A SOUND CHOICE



Combining contemporary and decorative design, Silentflor, Polyflor's acoustic heterogeneous sheet flooring offers a plethora of choice, developed to transform and enhance commercial environments. Silentflor is an ideal flooring solution for sectors including education, healthcare, retail and leisure, elevating heavy use areas out of the ordinary. Beyond its aesthetics, Silentflor provides superior acoustic performance, reducing impact sound by up to 19dB, delivering creative yet peaceful spaces.

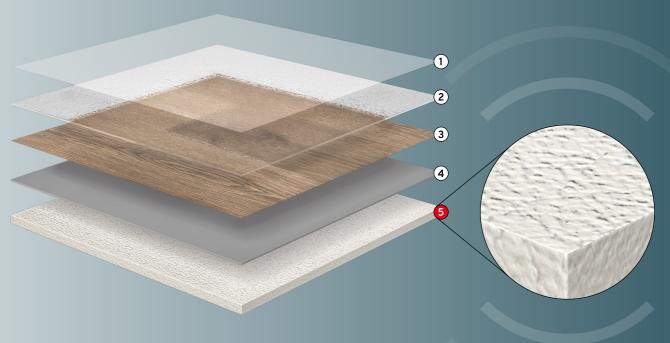

1 PUR Finish

Silentflor incorporates a polyurethane reinforcement (PUR) surface finish which protects and shields the product. Combined with the superior closed surface finish, this enhanced protection allows the use of a polish-free maintenance regime.

3 Decoration Layer

The decoration layer is responsible for the floor's aesthetic appearance and makes heterogeneous flooring a versatile choice for varying interior design schemes. The innovative printing technique enables a wide range of design options and styles, from natural wood effect to contemporary stone or unique abstract designs.

(2) Wear Layer

The 0.7mm commercial grade transparent wear layer is extremely dense, hard wearing and its key function is to protect the printed decorative layer. This layer also allows the surface embossing to create highly authentic wood grain, pitted stone or smooth effects.

4 Stabilisation Layer

This integral layer improves the product's dimensional stability and minimizes the effect of surrounding physical properties, for example fluctuating temperature and humidity. The stabilisation layer ensures the floor covering remains flat and stable for the product's life cycle.

5 Acoustic Backing Layer

The acoustic backing layer provides warmth and cushioning underfoot and achieves an impact sound reduction of at least 19dB. Moreover, this layer enables the floor covering to remain stable, durable and capable of handling heavy loads and impact without compromising performance.





Parquet

Silentflor 19dB now showcases the beauty of parquet flooring, offering 3 choices in a practical and versatile flooring solution. Combining realistic wood grain with rich natural tones, the newly developed parquet designs help to create elegant aesthetics, ideal for a wide range of interiors.

Pattern Size in Sheet:

88 x 700mm







8956 Serene Oak Parquet

w/r 9678



8957 Upland Oak Parquet

w/r 9679





8955 Eden Oak Parquet





Wood

Skillfully portraying natural beauty and intricacy of timber planks, the Silentflor 19dB wood range replicates a variety of stunning oak wood species spanning a wide palette from light to dark, ensuring a perfect solution for any design scheme.

Pattern Size in Sheet:

9952 Sun Bleached Oak

8951 Eden Oak

200 x 1500mm



9963 Smoked Oak



w/r 9827

w/r 9825

w/r 9671





8952 Ridge Oak



9951 Silver Oak w/r 9826



8954 Upland Oak

8953 Serene Oak w/r 9673








8951 Eden Oak

Elevate commercial spaces and unlock endless creative possibilities by mixing and matching Silentflor 19dB acoustic flooring. The versatile range of timber, textures, and patterns are expertly developed to be beautiful stand-alone floors, or equally combined to create bold and striking design floors.

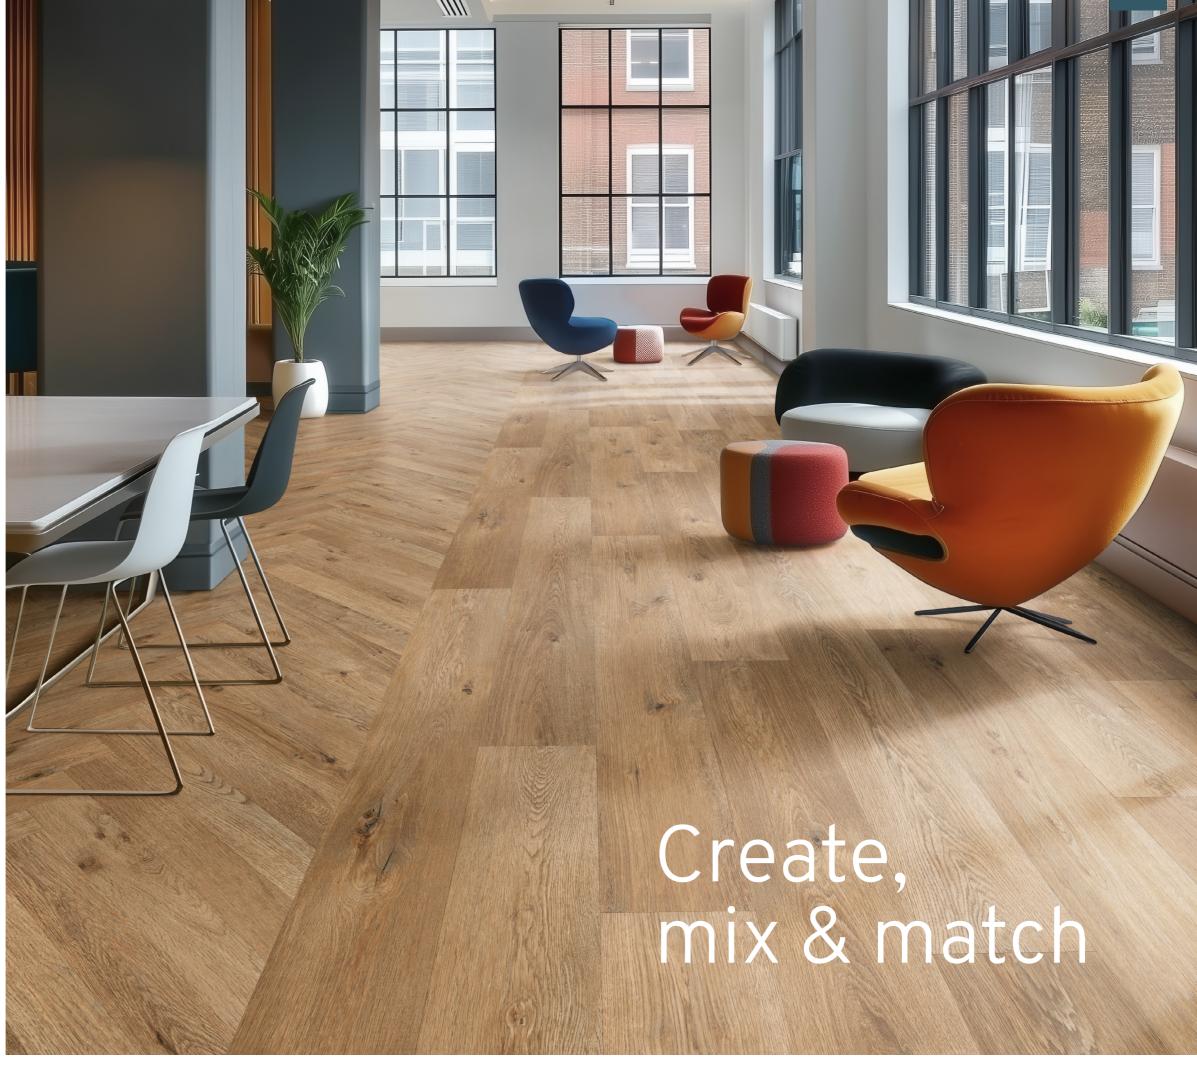







9952 Sun Bleached Oak
9951 Silver Oak





English Oak





Wood

For even more choice, the Silentflor 19dB collection also features elegant Limed Ash effects in varying colourways, offering muted tones and a distinctive whitewashed finish. Combined with softer, more subtle linear wood grain, these designs are perfect for creating bright, sophisticated and airy spaces.

Pattern Size in Sheet:

166 x 1500mm

167 x 1500mm *







9956 Blond Oak *



9953 Warm Limed Ash



9959 Honey Oak *



9954 Roasted Limed Ash



9960 Toasted Oak *







Visually defining areas through zoning can help to create functional and inviting learning environments. Combining colours and patterns is an effective way to define and organise functional areas such as classrooms, common areas and play zones without the need for physical barriers.







Concrete

Concrete effect vinyl flooring provides a sleek, modern aesthetic that combines the industrial appeal of raw concrete with the practicality and comfort of vinyl. Silentflor 19dB offers a wide choice of designs ranging from smooth, subtle textures to pitted, weathered effects, all of which complement a variety of commercial interior styles.








w/r 9856

9966 Cool Concrete



9968 Dark Grey Concrete



8960 Sepia Cement



w/r 9688

w/r 9855


9967 Warm Concrete



8959 Pewter Cement



9971 Copper Ornamental



8958 Dove Cement




9970 Dark Industrial Concrete




9969 Light Industrial Concrete



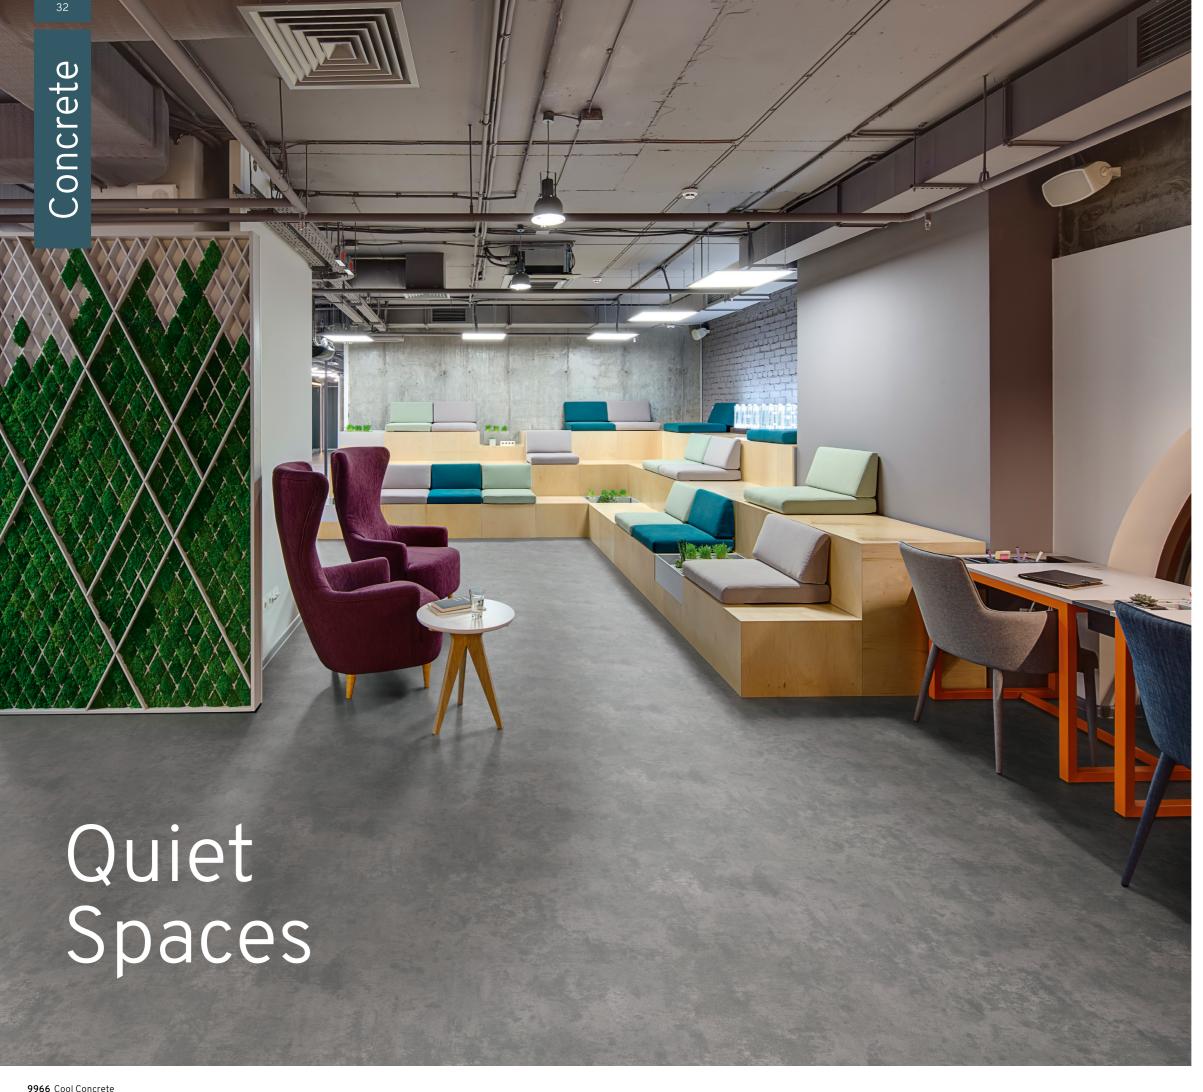

Quiet spaces are essential in busy environments such as offices and educational buildings, offering employees and students a place to study, focus and recharge without distraction. Silentflor 19dB significantly reduces impact sound, helping to control noise levels in commercial locations.




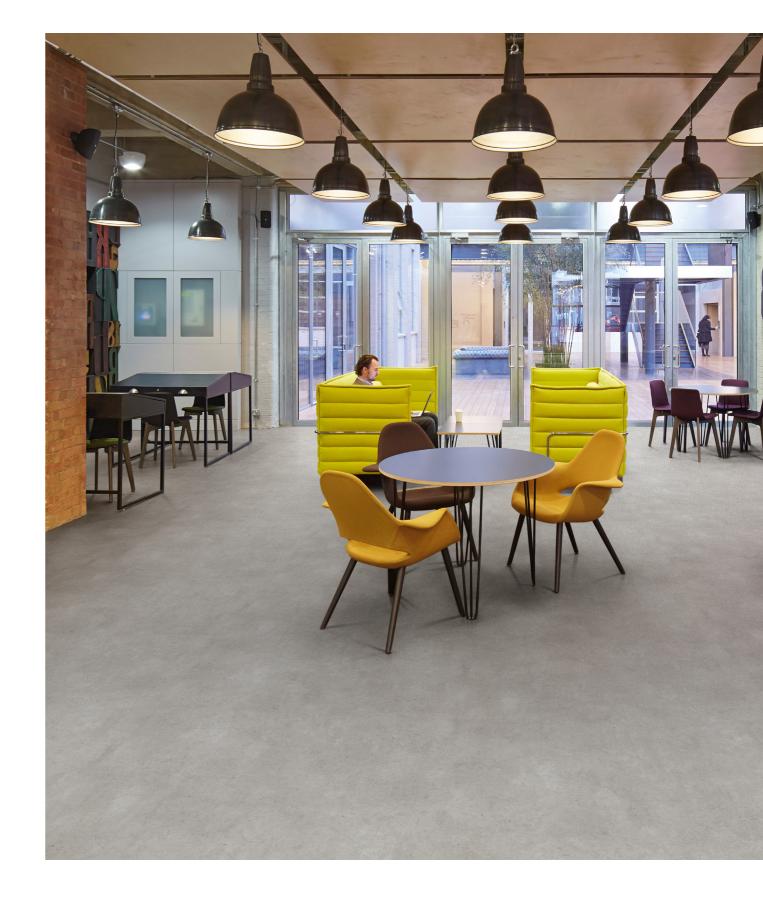


Pewter Cement & **8962** Oyster





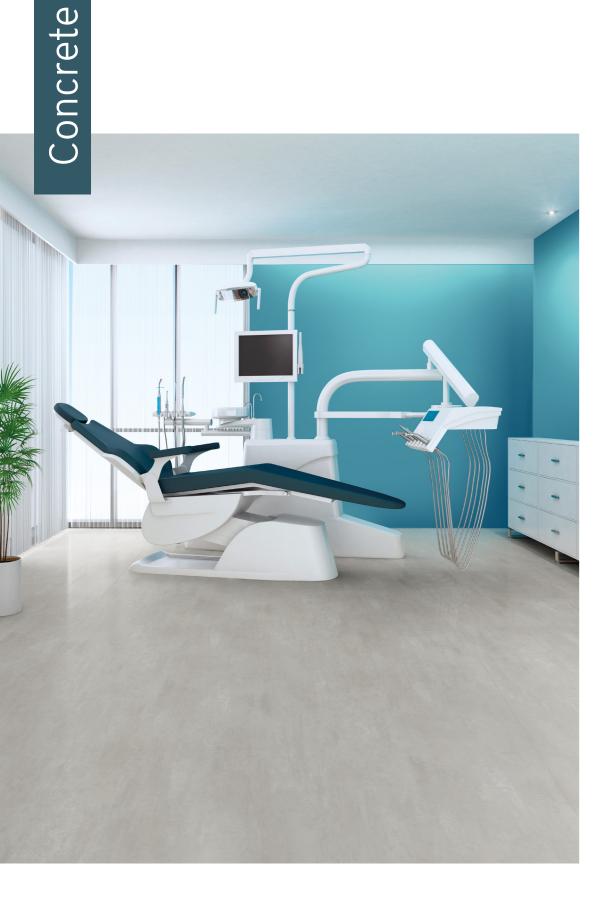



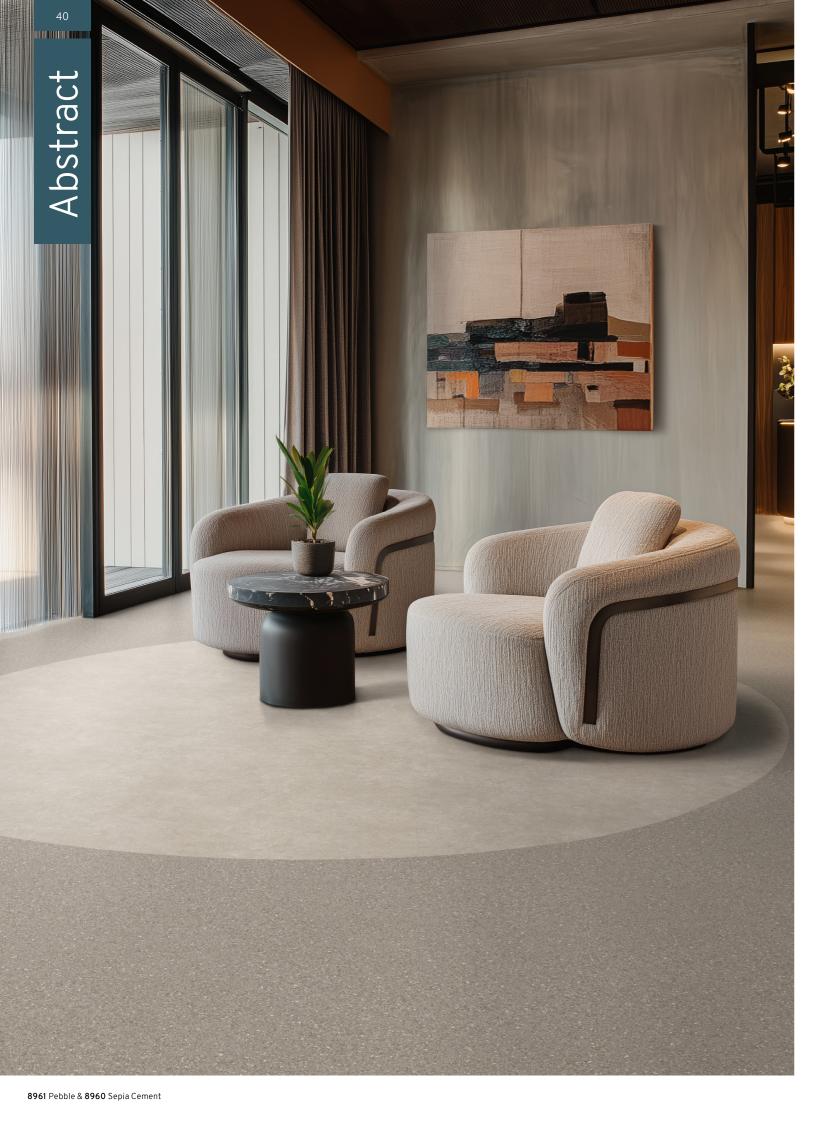



Abstract

Silentflor 19dB abstract designs provide an alternative to traditional wood or concrete effects. Instead, options such as infinity, terrazzo and cosmos offer sleek and refined beauty through their smooth, continuous surface that creates a clean and modern look. These designs enhance the sense of space and flow within interiors, contributing to a minimalist and uncluttered aesthetic.

Infinity \downarrow

Cosmos ↓



9973 Storm w/r 9845



9985 Honey Beige



8962 Oyster w/r 9693

Terrazzo ↓





9986 Autumn Rain



8961 Pebble w/r 9691




9974 Jet w/r 9842

Silentflor 19dB not only reduces noise, but also provides enhanced comfort underfoot, thanks to its soft, cushion backed, resilient construction. In commercial environments, comfort underfoot can lead to increased productivity and satisfaction, especially in sectors such as offices and retail where employees spend long hours standing or walking.







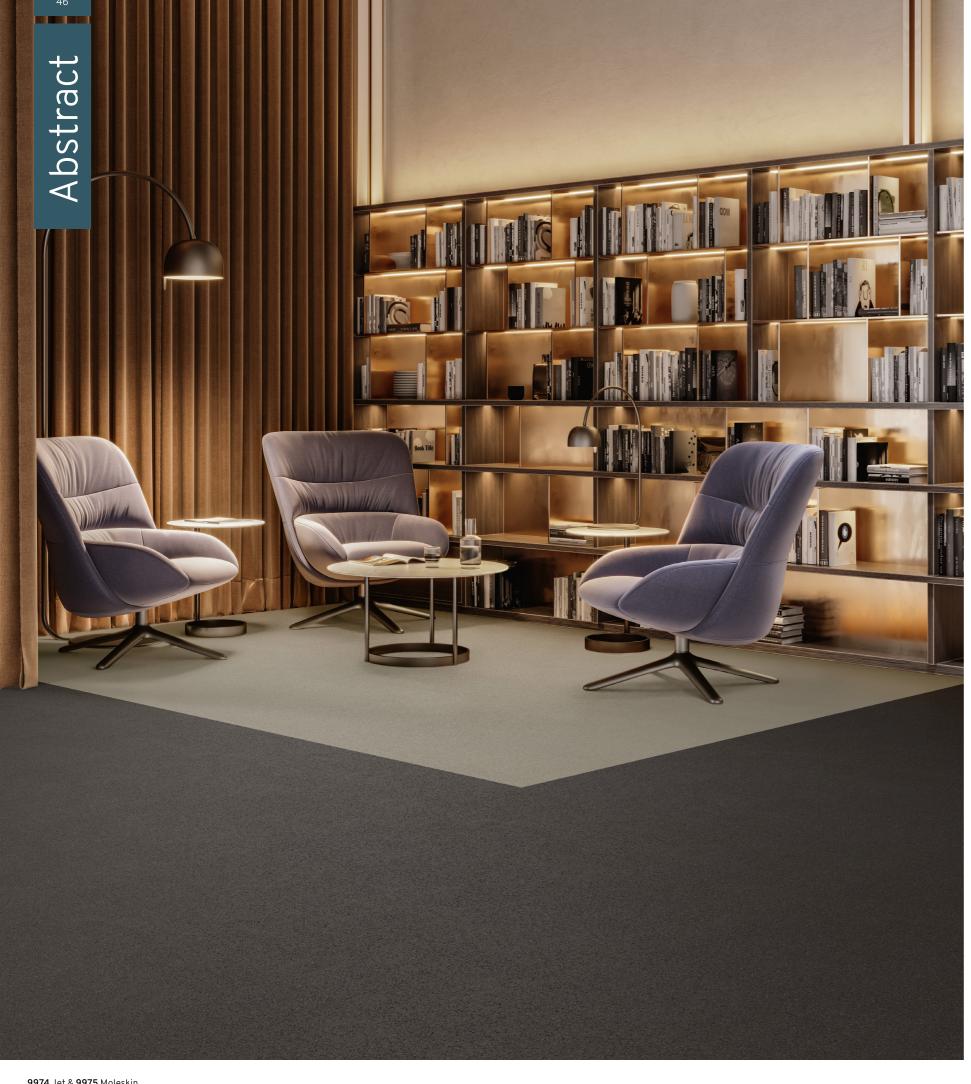



Case Study

Location: Hong Kong

Sector: Workplace

Products Used: Silentflor, Forest fx

Project: Klook Travel Office, Hong Kong

it very easy for installation in this property. We were

Polyflor to match the aesthetic and comfort required of

Kenny Kinugasa-Tsui, architect

"The thickness of the Silentflor flooring products made conscious that we should reduce noise from walking as much as possible, and we felt the product had sufficient acoustic absorption to meet that need.

We were particularly pleased to be able to select from the wide range of material textures and colours available from this workplace design."









Case Study

Project: University of Mpumalanga, South Africa


Location: South Africa

Products Used: Silentflor

Sector: Education

"As well as the specific properties of the flooring, it was also important to ensure the product demonstrated true value and return on cost when compared to its competitors, as we were appointed to spend public money. Silentflor was a clear choice because of this and we're confident it's delivered on the brief."

Ludwig Hansen, Founder of Ludwig Hansen Architects

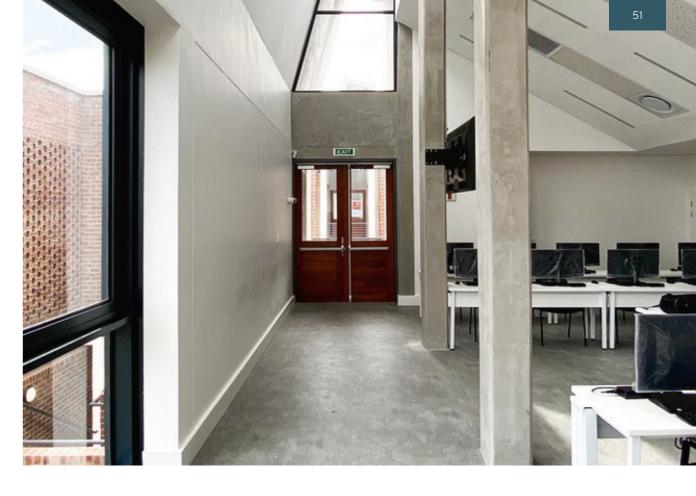







As a leading global manufacturer of high-quality, high-performance sustainable floor coverings, Polyflor has demonstrated a significant level of commitment to minimising environmental impact. This meets the company's values, but also complies with ongoing objectives for ISO 14001 Environmental Management System and BES 6001 Responsible Sourcing accreditation.

Silentflor is 100% recyclable, whilst also containing up to 10% recycled material. It contains 52% natural material, is phthalate free and REACh compliant. Silentflor is extremely durable with its 0.7mm protective wear layer and PUR finish, and promotes a 10 year commercial guarantee. Easily cleaned with fewer chemicals, less water, and less energy, it is also non-shedding and does not harbour dust important for clean air quality.

Furthermore, Silentflor achieves Indoor Air Comfort Gold and FloorScore certification for exceptionally low VOC emissions, providing indoor air quality and comfort. In support of sustainable construction, particularly with regards to LEED, WELL, SKA and Green Star projects, Polyflor has a Product Specific EPD (Environmental Product Declaration) and BRE LCA to assist.

For more information on our sustainability credentials, go to www.polyflor.com

ORDER SAMPLES

Polyflor provides a complementary product sample service so you can sample your choice of flooring before you make your final selection, and ensure you find the exact floorcovering you are looking for. To order your free sample of any Silentflor colour, visit the Polyflor website, call the dedicated Polyflor Samples Hotline on +44 (0) 161 767 2551 or speak with your local Polyflor provider.

CONTACT US

For general information on your specific project, either speak with your local Polyflor provider or contact us directly. If you require additional detailed technical data, either visit polyflor.com and follow the links to the technical pages, contact Polyflor Customer Technical Services on +44 (0) 161 767 1912 or email tech@polyflor.com.

MAINTENANCE

The incorporation of a polyurethane reinforcement (PUR) into the Silentflor collection helps to protect the floor covering by resisting soiling and scuffing. Combined with the superior closed surface finish, this enhanced protection allows the use of a polish-free maintenance regime for the lifetime of the flooring.

















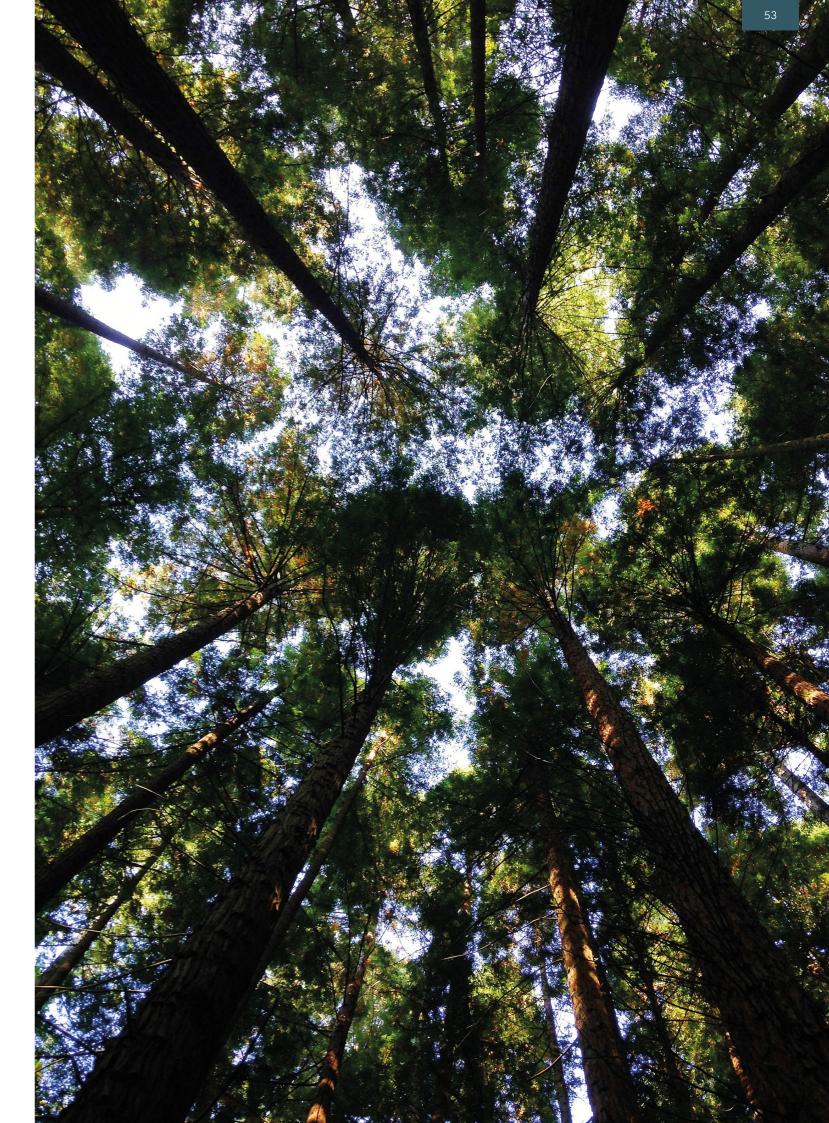

Product Format	Standard	Result
Gauge	ISO 24346 (EN 428)	3.7mm
Wear Layer	ISO 24340 (EN 429)	0.7mm
Total Weight	ISO 23997 (EN 430)	2550g/m²
Finish		PUR
Sheet Size	Size & Coverage per Roll	Shades
Sheet	2m x 20m = 40m ²	34
Silvet	2111 × 20111 – 40111	34
Performance Requirements	Standard	Result
General Performance	ISO 11638 (EN 651) ASTM F1303	Conforms Type I, Grade I, Class C Backing
Use Area Slip Resistance	ISO 10874 (EN 685)	23, 34, 42
	EN 13893	Class DS
	DIN 51130 / DIN EN 16165 Ann. B	R10
	AS 4586	R10
	ASTM D2047	SCOF ≥0.5
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 651	Group T
Reaction to Fire	EN 13501-1 ASTM E648	Class Bfl-S1 Class 1
	CAN/ULC S-102.2	FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F1914	≤0.005"
	ASTM F970 (Modified)	≤0.009" (750psi)
Castor Chair (continuous use)	ISO 24343-1 ISO 4918 (EN 425)	≤0.20mm Suitable
Dimensional Stability	ISO 23999 (EN 434)	≤0.40%
- Dimensional Stability	ISO 24344 (EN 435)	(Method A) Pass 20mm ø
Flexibility	ASTM F137	0.25" Pass
Thermal Resistance	ISO 12667	0.0525m² K/W
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Furniture Leg	ISO 16581 (EN 424)	Pass
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets
Sustainability	Standard	Result
GreenTag	LCA Rate Gold Plus	GreenRate level A
Specific EN 15804 EPD		Available
Recyclable		100%
Recycled Content		10%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified
AgBB/ABG		Pass
Responsible Sourcing	BES 6001	Excellent
Acoustic Performance	Standard	Pasult
	Standard ISO 10140-3	Result
Impact Sound Reduction	ISO 10140-3	19dB
Sound Transmission Coefficient	ASTM E90/E492	STC 57
Impact Insulation Class	ASTM E90/E492	IIC 56
Maintenance Performance	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance
	<u> </u>	

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

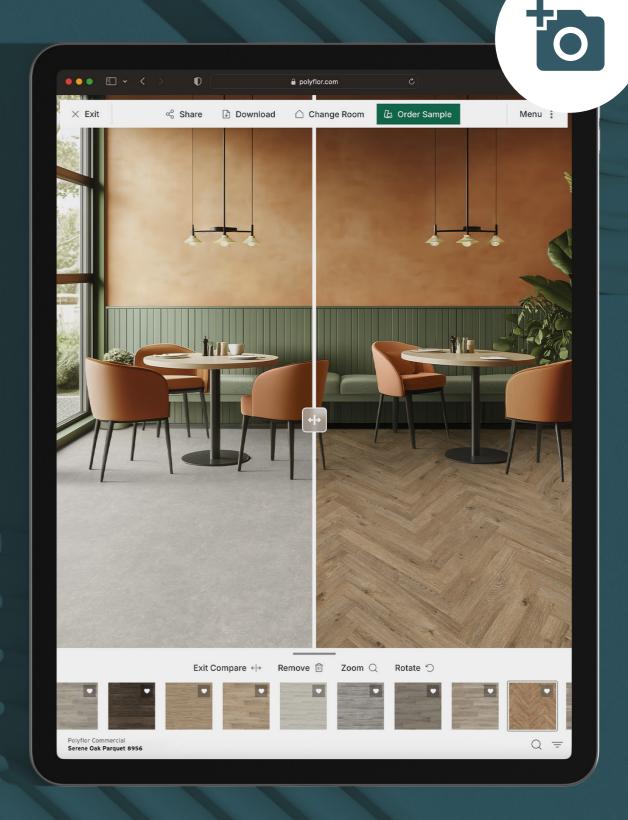

Explore and compare design options with our online visualiser

PICTURE IT INSTANTLY

visit www.polyflor.com/visualiser



Silentflor

POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: 1800 777 425
Fmail: sales@polyflor.com.au

Canada

Polyflor Canada Inc. Tel: +1905 364 3000 Email: sales@polyflor.ca

China

Polyflor North Asia Ltd Tel: +(852) 2865 0101 Email: info@polyflor.com.hk

Colombia

Polyflor Ltd. (LATAM Office) Tel: +57 3142859005 Email: export@polyflor.com

France

James Halstead France SAS Tel: +33 (0)8 20 20 32 11 Email: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH Tel: +49 (0) 2236 966 330 Email: info@objectflor.de

Ireland

Polyflor Ireland Tel: +353 (1) 864 9304 Email: salesireland@polyflor.com

Malaysia

Polyflor Martex
Tel: 1300 80 7788
Fmail: sales@polyflor.com.my

Middle Eas

Polyflor Ltd. Tel: +971 50 406 8114 Email: export@polyflor.cor

New Zealand

Polyflor New Zealand Ltd. Tel: 0800 765 935 Tel: +64 9 269 1111 Fmail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
Email: firmapost@polyflor.no

Spain

Polyflor Ltd. Tel: +34 619 949 054 Fmail: export@polyflor.cor

Sweden

Polyflor Nordic Sweden AE Tel: +46 (0) 300 15820 Email: info@polyflor.se



POLYFLOR™ UK

Polyflor Ltd. PO Box 3, Radcliffe New Road, Whitefield Manchester M45 7NR

Tel: +44 (0) 161 767 1111 E-mail: info@polyflor.com

James Halstend FLOORING