





Acoustifoam


ACOUSTIFOAM

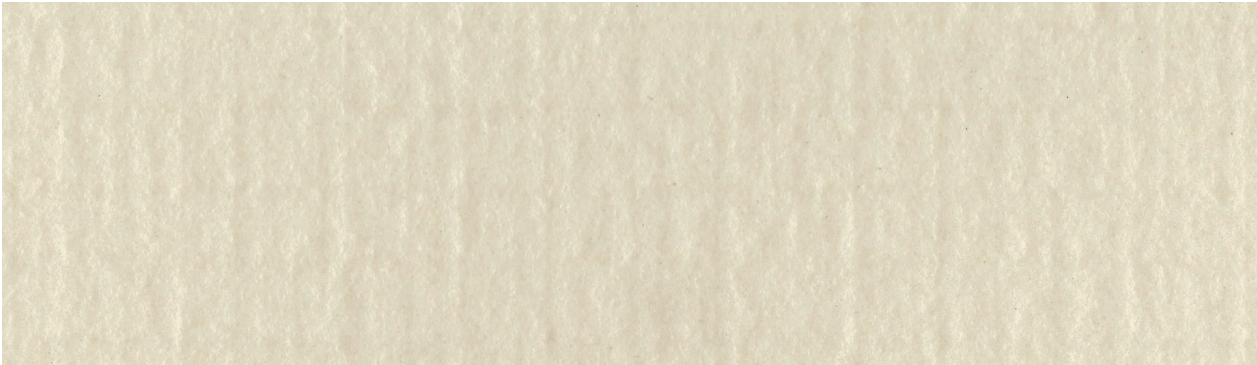


Acoustifoam

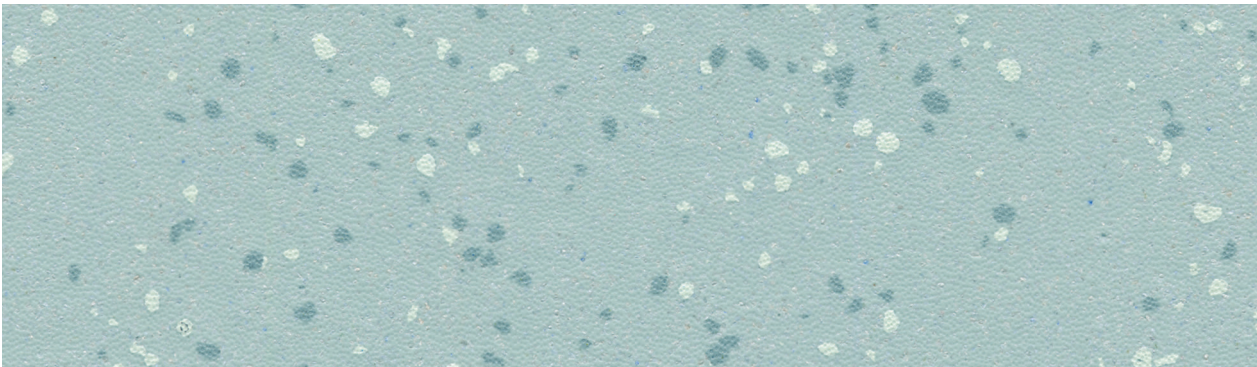

Polysafe Verona Fresh Mint **5209** with Acoustifoam

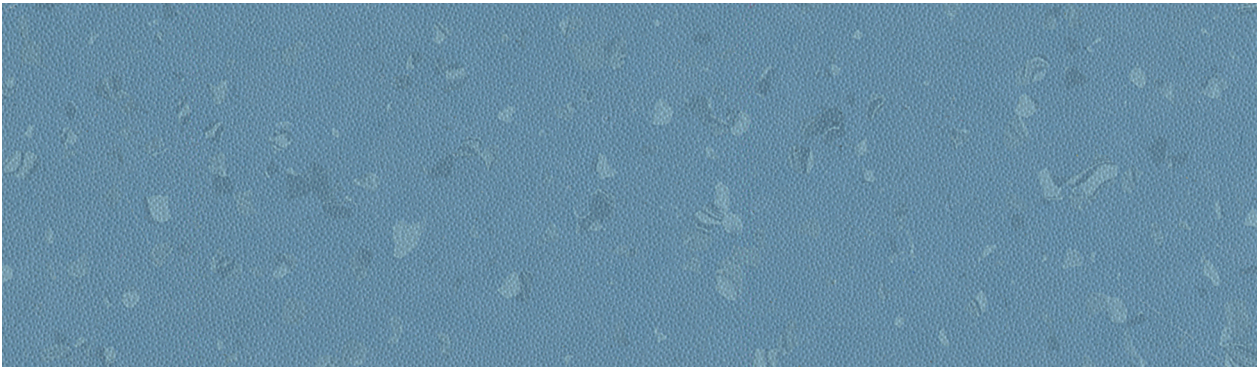

Palettone Faded Denim **8613** with Acoustifoam

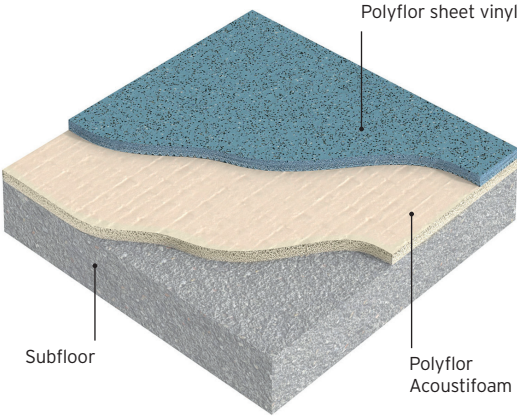

Acoustifoam

Polyflor's Acoustifoam is closed cell PVC foam backing sheet which significantly reduces impact sound. Designed to be installed beneath standard Polyflor vinyl to achieve an impact sound reduction level of 19dB. Ideal for use in hospitals, schools, high rise buildings and other locations where noise reduction is required. Acoustifoam allows an expansive choice of colours, styles and performance characteristics when paired with 2.0mm Polyflor Vinyl.



	Gauge	ISO 24346 (EN 428)	2.0mm
	Roll Size	ISO 24341 (EN 426)	2m x 20m = 40m ²
	Total Weight	ISO 23997 (EN 430)	680g/m ²
	Reaction to Fire*	EN 13501-1	Class Bfl-S1 Class Cfl-S1 (when laid underneath Polyflor Heterogeneous vinyl)
		*Figures based on Acoustifoam laid underneath Forest fx, Palettone PUR, Prestige PUR, Polysafe Verona PUR and Polysafe Standard PUR	
	Impact Sound Reduction*	ISO 10140-3	2mm Polyflor Vinyl with Acoustifoam: 19dB
		*Figures based on Acoustifoam laid underneath 2mm Polyflor sheet vinyl	
	For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com. The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com .		

